



Pemegang Lisensi dari KSA/ISO untuk Kualitas Produk Peralatan F&B Terbaik

ISO 9001:2007
REGISTERED

AUTOMATIC GAS RICE COOKER

World's First Rice Cooker
with DUAL Control System:
Temperature & Timer Sensor

Features & Benefits

- ⊙ Thermal efficiency maximizing energy saving cooking system, save up to 13%.
- ⊙ Special Protective Coating Kettle from aluminium to keep discoloration and prevents the scorching of rice.
- ⊙ Quick Cooking System: the combination between central coverage heating system & unique heat insulation plate will keep heat on position, make cooking quicker.
- ⊙ Our automated gas rice cooker offers the taste of analogue and the convenience of digital technology. All operations are displayed digitally on LCD.
- ⊙ Safety Device
 - a. W-Thermistor: to avoid over-heating and abnormal operation.
 - b. Two Electronic Valves: to avoid gas leaking.
- ⊙ Compact Body with full solid frame and user-friendly design, thinner & higher than others with control panel position on top.
- ⊙ Internal Battery: possible to cook even the electric current is off.
- ⊙ Special function of thermostat and timer sensors to avoid over-cook.
- ⊙ Possible to cook various dishes, such as: mush potato, curry, porridge, etc.



SCC-150N



Special Protective
Aluminium Coating Kettle



Rolling Rail to put in/out Kettle
easier & always fit in to position



100% Aluminium Burner

JS

AUTOMATIC GAS RICE COOKER



SCC-150N




SCC-100N

World's First Rice Cooker
with DUAL Control System:
Temperature & Timer Sensor


Diagram & Parts Name

NO	PART NAME	MATERIAL	QUANTITY
1	The Upper Plate	STS430 No.4	1
2	The Door Grip	STS430	3/3
3	Insulated Lagging	CERAKWOOL	
4	Cauldron/ITS LID	Aluminium/STS304	3/3
5	Thermostat Assembly	STS430	3
6	Burner	Aluminium Alloy	3
7	Gas Rice Cooker Door	STS430 No.4	3
8	Adjusting Leg	STS430	4
9	ON/OFF Switch		1
10	Control Board		1
11	Control Box	STS430	1
12	Marking Plate	Aluminium	1
13	Quality Control		1
14	Damper	STS430	3
15	Length-Adjusting Bolt	STS430	4

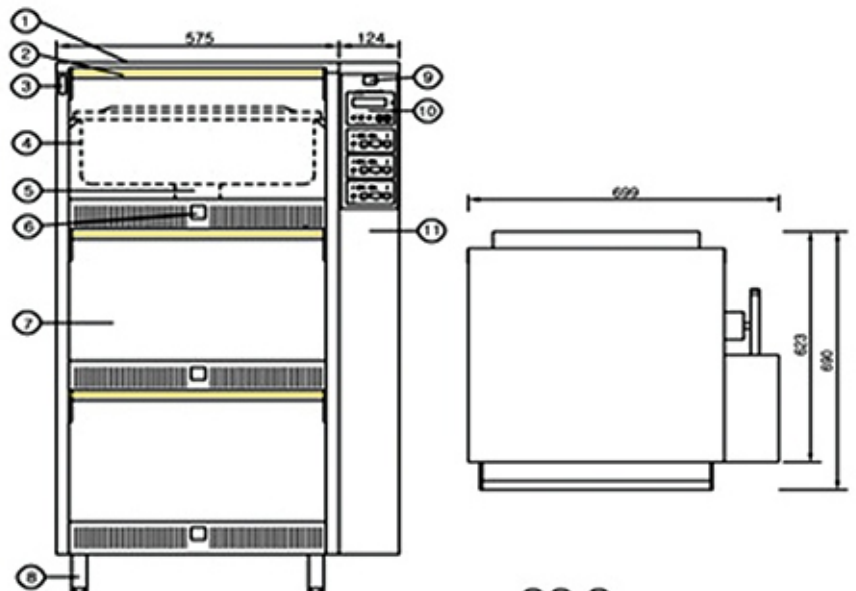

Specification

SPECIFICATION	SCC-100N (100 portions)	SCC-150N (150 portions)
Width	700	700
Length	700	700
Height	914	1,340
Weight (kg)	105	155
Gas Connection	20A(3/4B)	20A(3/4B)
Electrical Rating	220-240V/50H	220-240V/50H
Electric Power Consumption	45W/h	59W/h
Gas (LNG/LPG)	19,600(Kcal/h) 1.5(kg/h)	29,400(Kcal/h) 2.23(kg/h)

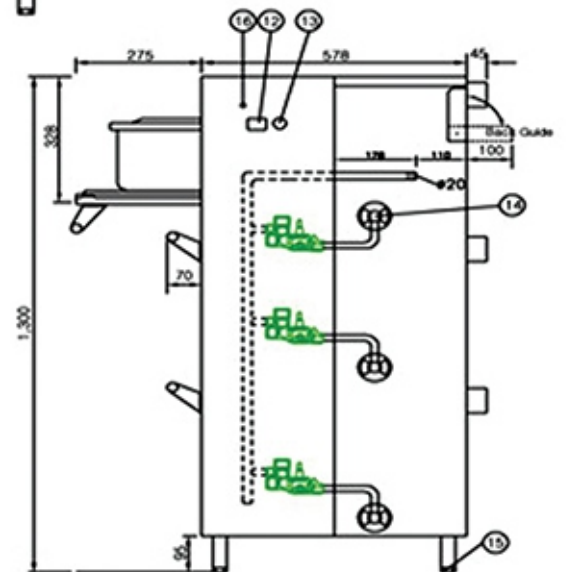

PT. JS UTAMA

ASTC (Alam Sutera Town Center) Blok 10D No.19
Jl. Boulevard Alam Sutera, Tangerang 15325, INDONESIA
Telp. 6221 2900 8610 (Hunting), 2900 8611/12
Fax. 6221 2900 8613
www.jsutama.com Email. marketing@jsutama.com

